



Decorative Plaster Coating Primer

Product Description

It is a styrene acrylic copolymer based, white colored primer for wood, chipboard, plywood and metal surfaces.

Areas of Use

- It is used before coating applications
- On thermal insulation systems.

Advantages


- It creates a special adhesion between the application surface and Newkim Decorative Plaster.
- It prevents dirt and stains on the old surface from getting on the Newkim Decorative Plaster Coating Primer.
- It reduces the water absorption of the surface.
- Easy and practical application High Adherence power

Preparation of the Surface

- The surfaces to be applied should be free of all kinds of pollution and dry.
- If the interior or exterior is previously covered with a solvent-based paint, this surface must be sanded and the paint layer on the surface must be removed.

Application Details

- Newsan Decorative Coating Primer is applied directly on one of the brushes, roller or spray applications on the emulsion based painted or interior or exterior surfaces to be applied for the first time.
- Completing the setting time of cement-based surfaces should be expected.
- Stir before application.
- Newsan decorative plaster coating primer is applied 24 hours after application.

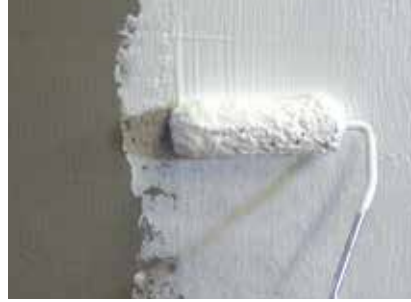

Thinning

When necessary, it is diluted with water by 10-15%.

Color

White

Consumption

Depending on the application and depending on the floor, 250 gr / m² area can be painted in one coat.

Packaging

15 kg. PE Bucket

Shelf Life

1 year from the date of production in drought and dry environments